



## AeroZero® Thermal Protection Systems AZ-TPS 100

### Product Description


AZ-TPS 100 consists of a 165 micron (6.5 mil) AeroZero® polyimide aerogel film with a 25.4 micron (1 mil) adhesive applied onto a single side. The adhesive is a high-performance engineering grade silicone pressure sensitive adhesive (PSA) with a release layer that is peeled off before application onto a substrate. Potential substrates include stainless steel, aluminum, glass, and polymer substrates such as polyimides, polyether ketones, polyurethanes, and polyesters. Typical use is thermal barrier/insulation of parts in the Aerospace, Defense and Electronic industries.

### Applications

Prior to peeling the release liner from the adhesive, ensure the surface is clean and free of loose particles. Standard application temperature is 25 °C (77 °F) and the recommended set time for optimal adhesion is 3 days prior to testing. The minimum application temperature is 10 °C (50 °F) and minimum set time is 24 hours before performing any tests. Increasing temperature and dwell time may increase adhesion strength.

### Features

- ◇ Ultra-thin thermal protection system (TPS)
- ◇ Flexible application onto complex parts
- ◇ Enhances thermal performance of substrates
- ◇ Easy application with permanent bonding
- ◇ Flame retardant
- ◇ Lightweight

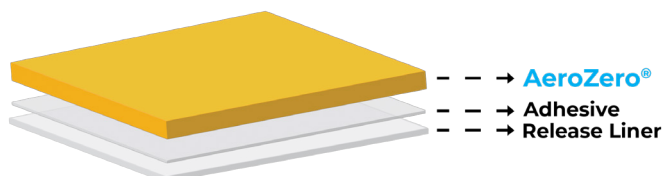

### Standard Dimensions

- ◇ Test Sample: 216 x 356 mm (8.5 x 11 in)
- ◇ Sample Roll: 304 mm x 3.05 m (1 x 10 ft)
- ◇ Standard Roll: 304 mm x 30.5 m (1 x 100 ft)

### Storage

- Recommended Storage Conditions:
- ◇ Temperature: below 25 °C (77 °F)
  - ◇ Relative Humidity: below 50%



*Lighten. Protect. Perform.*



### AeroZero® Thermal Protection Systems AZ-TPS 100 Data


Physical and Mechanical Properties	Method	Value
Product Code	-	2000-01S1-000
Thickness, μm (mil)	In-House Method	190 ± 38 (7.5 ± 1.5)
Tensile Strength, MPa (ksi)	ASTM D882-12	7.2 ± 1.5 (1.0 ± 0.3)
Young's Modulus, MPa (ksi)	ASTM D882-12	250 ± 75 (36 ± 11)
Tensile Elongation at Break, %	ASTM D882-12	6 ± 2
Density, g/cm <sup>3</sup>	In-House Method	0.38 ± 0.05

Thermal Properties	Method	Value
Thermal Conductivity (25 °C), W/m·K	ASTM C518-21	0.038 ± 0.003
Specific Heat Capacity (25 °C), J/g·°C	ASTM C1784-20	1.08 ± 0.06

Thermomechanical Properties	Method	Value
Glass Transition Temp (AZ T <sub>g</sub> , DMA), °C (°F)	ASTM E1640-13	305 (580)
Decomposition Temp (10 wt% loss, TGA), °C (°F)	ASTM 2550-17	410 (770)

Additional Properties	Method	Value
Adhesive Strength:		
180 °peel/3 day-RT dwell time AZ film on 50.8 micron (2 mil) Al Foil N/m (lb/in)	ASTM D3330	>300 (1.7)
UL Flammability Rating	UL94 VTM0	VTM-0

Data within this table are typical values for the standard AeroZero® TPS product family.  
Product Code # 2000-01S1-000



Blueshift products are manufactured under a certified AS 9100D/ ISO 9001:2015 Quality Management System facility. See our website for more information on Blueshift products.

*Lighten. Protect. Perform.*