




RockeTape™ Heat Resistant Thermal Tape RT-AZ VDA Polyimide

Product Description

RT-AZ VDA PI consists of a 165 micron (6.5 mil) AeroZero® polyimide aerogel film with a 25.4 micron (1 mil) external polyimide film joined with a 25.4 micron (1 mil) adhesive. The polyimide film is coated with a highly reflective layer of 1000 Å Vapor Deposited Aluminum (VDA). The opposite side has a 25.4 micron (1 mil) adhesive layer for bonding to substrates. The adhesive is a high-performance engineering grade silicone pressure sensitive adhesive (PSA) with a release layer that is peeled off before application. Potential substrates include stainless steel, aluminum, glass, and polymer substrates such as polyimides, polyether ketones, polyurethanes, and polyesters. Typical use is thermal barrier/protection of parts in the Aerospace, Defense and Electronic industries.

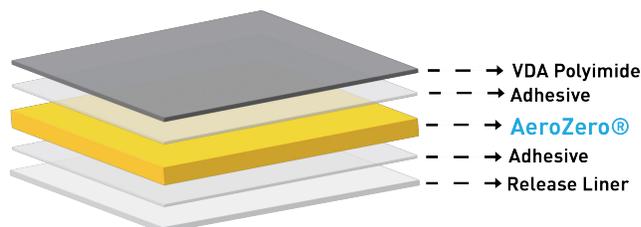

Applications

Prior to peeling the release liner from the adhesive, ensure the surface is clean and free of loose particles. Standard application temperature is 25 °C (77 °F) and the recommended set time for optimal adhesion is 3 days prior to testing. The minimum application temperature is 10 °C (50 °F) and minimum set time is 24 hours before performing any tests. Increasing temperature and dwell time may increase adhesion strength.

Features

- ◇ Ultra-thin thermal protection system (TPS)
- ◇ Flexible application onto complex parts
- ◇ Easy application with permanent bonding
- ◇ Flame retardant
- ◇ High reflectivity
- ◇ Lightweight

Uses

- ◇ Launch vehicle protection
- ◇ Supersonic munition and aircraft
- ◇ High performance race cars and boats

Standard Dimensions

- ◇ Standard Roll: 25 mm wide x 7.6 m long (1 in x 25 ft)

Storage

- Recommended Storage Conditions:
- ◇ Temperature: below 25 °C (77 °F)
 - ◇ Relative Humidity: below 50%





RockeTape™ Heat Resistant Thermal Tape RT-AZ VDA Polyimide


Physical and Mechanical Properties	Method	Value
Product Code	-	5045-11S1-251
Thickness, μm (mil)	In-House Method	240 ± 38 (9.5 ± 1.5)
Tensile Strength, MPa (ksi)	ASTM D882-12	15 ± 3 (2 ± 0.4)
Young's Modulus, MPa (ksi)	ASTM D882-12	500 ± 50 (73 ± 7)
Tensile Elongation at Break, %	ASTM D882-12	9 ± 2
Density, g/cm ³	In-House Method	0.60 ± 0.05

Thermal Properties	Method	Value
Thermal Conductivity (25°C), W/m·K	ASTM C518-10	0.046 ± 0.003
Specific Heat Capacity (25 °C), J/g·°C	ASTM C1784-20	1.18 ± 0.05
IR Reflectivity (VDA PI Surface)	ASTM E408-13	0.96
IR Emissivity (VDA PI Surface)	ASTM E408-13	0.04

Thermomechanical Properties	Method	Value
Glass Transition Temp (AZ T _g , DMA), °C (°F)	ASTM E1640-13	305 (580)
Decomposition Temp (10 wt% loss, TGA), °C (°F)	ASTM 2550-17	410 (770)

Additional Properties	Method	Value
Adhesive Strength:		
180 °peel on Al Panel, N/m (lb/in)	ASTM D3330	>300 (1.1)
UL Flammability Rating	UL94 VTMO	VTM-0

Data within this table are typical values for the VDA Polyimide product family.
Product Code # 5045-11S1-251



- VDA PI: 25.4 micron (1 mil)
- Silicone Adhesive (PSA): 25.4 micron (1 mil)
- AeroZero (AZ): 165 micron (6.5 mil)
- Silicone Adhesive (PSA): 25.4 micron (1 mil)



Blueshift products are manufactured under a certified AS 9100D/ISO 9001:2015 Quality Management System facility. See our website for more information on Blueshift products.